lunorre.co
Info@Lunorre.co


SPECIFICATION AND INSTALLATION GUIDE

Asher Minimalist Flush Mount Ceiling Light

A slim metal drum with a frosted acrylic diffuser and an integrated warm LED, in two heights and three earthy colors. It is hardwired to a standard US junction box. This guide covers every specification, sizing, a step by step installation, everyday use, care and troubleshooting.





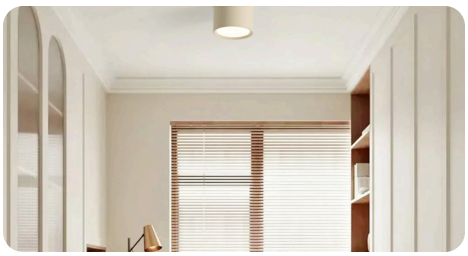


4.7"	3.1"	5.9"	7W	3
diameter	shallow height	tall height	integrated LED	colors
12 cm	8 cm	15 cm	warm light	Cream, Green, Coffee


01 SPECIFICATIONS

Sizes	Shallow: 4.7" across x 3.1" high (12 x 8 cm) Tall: 4.7" across x 5.9" high (12 x 15 cm)
Materials	Metal body, frosted acrylic diffuser
Colors	Cream, Green, Coffee
Mounting	Ceiling, flush, hardwired

Supply	110 to 120 V AC, US
Connection	Hardwired to a standard US junction box
Light source	Integrated LED, warm light, about 7 W
Dimming	Not dimmable
Switch	Standard wall switch, not included
Location	Indoor, dry locations only

02 DIMENSIONS

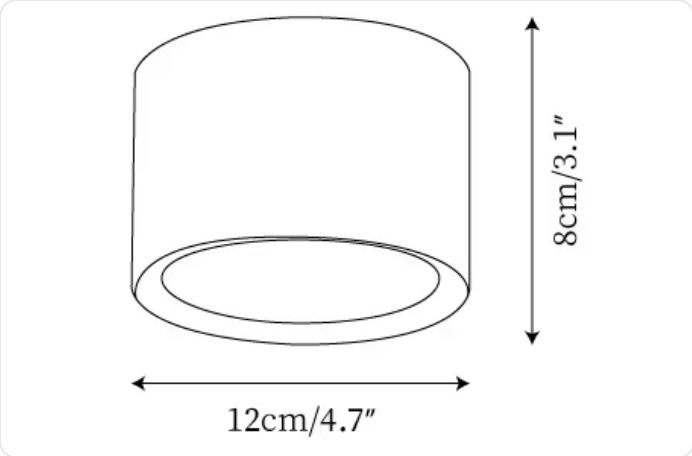

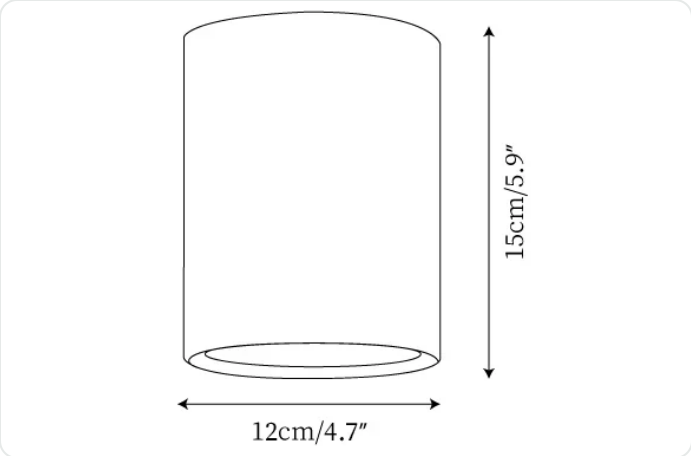

Shallow. 4.7" (12 cm) across and 3.1" (8 cm) high. Hallways, compact bedrooms and ceilings under 8 ft.

Tall. 4.7" (12 cm) across and 5.9" (15 cm) high. Bedrooms, kitchens and entries, especially ceilings of 9 ft or more.

Dimensions are nominal and may vary slightly.

03 FINISHES

Cream
A warm off white, closer to linen than pure white.

Green
A soft muted green.

Coffee
A warm brown tone.

04 IN THE BOX

- Drum light with integrated LED
- Mounting base plate and screws
- Wire connectors and instruction sheet

05 WHAT YOU NEED


- Licensed electrician (recommended)
- Non contact voltage tester
- Screwdriver and wire stripper
- Drill with suitable anchors if the plate needs extra fixings
- Sturdy step ladder
- A second person to hold the fixture

06 CHOOSE THE SPOT

A few minutes of planning makes the fixture sit straight and at the right height.

- **Junction box:** an existing, properly secured ceiling junction box rated for the fixture weight.
- **Rows:** in a hallway, space several lights evenly along the center line.

07 INSTALLATION

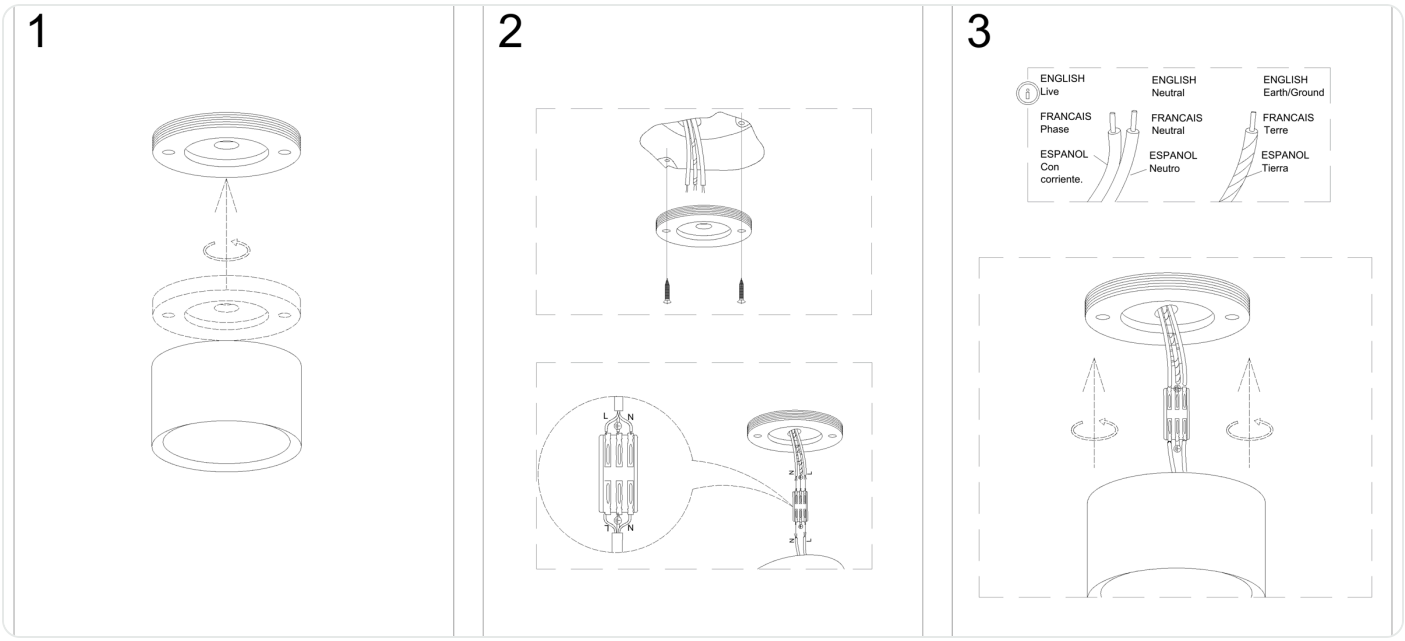

Installation diagram: 1 base plate, 2 mounting and wiring, 3 twist on the drum

1 Turn off the power

Switch off the circuit at the breaker and confirm the ceiling wires are dead with a voltage tester.

2 Separate the base

Twist the drum body off its base plate. (Diagram step 1)

3 Fix the base and connect

Screw the base plate to the junction box, then join black (hot) to black, white (neutral) to white and ground to the green ground screw. (Diagram step 2)

4 Twist the drum on

Tuck the wires in, line up the drum with the base and twist it on until it locks, then restore power. (Diagram step 3)

08 EVERYDAY USE

On and off	From the wall switch the light is wired to
Dimming	Not dimmable
Color	Warm light

09 CARE

- Switch off and let the fixture cool before cleaning.
- Dust with a dry, soft cloth.
- Avoid water, sprays and solvents on metal and shades.

10 TROUBLESHOOTING

If	Try this
Light does not turn on	Check the breaker and the wall switch, then confirm every wire connection is tight.
Flickering	Confirm the connectors are secure. If a dimmer is used, it must be an LED compatible dimmer and only on a dimmable version.
Fixture sits crooked	Loosen the plate screws, level the plate and tighten again before fitting the canopy.
Anything else	Email Info@Lunorre.co with the order number and a photo.

11 SAFETY AND REQUIREMENTS

- Hardwired fixture. Installation by a licensed electrician in line with the National Electrical Code and local codes is recommended.
- Mount only to a ceiling junction box rated to carry the fixture weight.
- Turn off power at the breaker before installing, cleaning or changing any part.
- Indoor, dry locations only.
- Not for shower zones, above a tub or outdoors.
- Do not connect to a dimmer.

Dimensions and performance figures are nominal and subject to manufacturing tolerance. Questions before or after installation: Info@Lunorre.co, +13313065081. Lunorre, lunorre.co